



MPS43

Ultra Compact Automatic Air Data Test Set

- Automatic Ps and Pt control
- RVSM compliant
 - Integral 1500 hour pumps
 - Ultra compact
 - Built-in safety features



MPS43 Precision Ultra Compact Digital Air Data Test Set

SUPPLYING AIR DATA TEST SETS TO THE WORLD

DMA traces its origins back to 1938, mainly as a test equipment manufacturer to support European aviation requirements. Today DMA supply precision Air Data Test Sets and other aviation ground support equipment to aircraft manufacturers, repair stations and operators throughout the world.


ULTRA COMPACT FLIGHT LINE TESTER

The MPS43 is a unique instrument in that the first class capabilities in terms of precision and performance are all integrated into a remarkably small enclosure. It enables users to both utilize the air data testing characteristics and transport the instrument in ways not possible by more conventionally designed products. The rugged lightweight enclosure meets the demanding requirements of the aerospace industry, while offering cost and ownership benefits unmatched by alternatives.

USER INTERFACE

The conventional keypad is augmented by a multicolored touch screen display to provide maximum ease of use by both beginners and experts. Regular testing and troubleshooting is simple to perform with clear unambiguous readout and instruction inputs.

All the important air data functions are simultaneously displayed, constant screen or menu changes are not required. Readings of both commanded and measured test values are displayed.

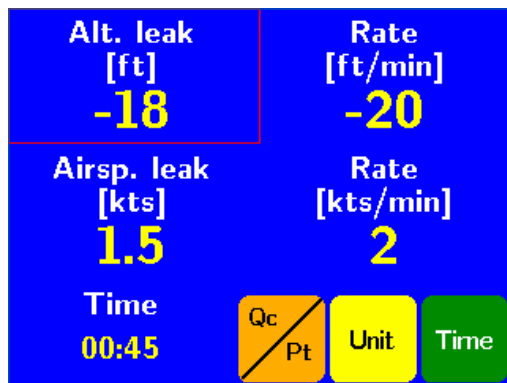

ACCURACY ACHIEVED BY THE END OF SELF TEST

A precision absolute sensor is utilized for the static, altitude channel, and a precision differential transducer for the Qc/Pt, airspeed, channel. Pressure and temperature characterization is applied to the sensors ensuring very high accuracy is achieved at all operating pressure values, without any significant warm-up time.

EXTENDED PUMP LIFE

The MPS43 is a rugged flight line instrument designed for low maintenance. The internal pressure and vacuum pumps run only in control mode of operation, extending the pump life.

AUTOMATED CALIBRATION

Calibration, performed by software, is fast and simple since no mechanical adjustments are required. Calibration factors are password protected for security. The resultant accuracy of the sensors exceeds the RVSM industry requirements.



INTERNAL BATTERY FOR SAFETY AND VERSATILITY

The MPS43 is equipped with an internal rechargeable battery that provides emergency back up power and gives up to 30 minutes of operation. For those occasions when the AC power fails during testing the battery allows the test to continue and provides safe shut down under total control at the conclusion of the test.

BUILT IN SAFETY LIMITS FOR UUT PROTECTION

The MPS43 is designed for maximum safety during testing. Key DMA design features protect both the test set and the systems under test. Negative Qc, a pressure condition of Ps greater than Pt, is prevented in both manual and automatic operation. If AC power is lost the Unit Under Test (UUT) is safely isolated and can be manually vented preventing instrument and test set damage.

Numerous preset factory or user programmed safe limits are provided to prevent damage to the UUT. These limits can be modified by the user either temporarily or permanently, with password protection if desired.

PROGRAM TESTING

Up to 30 independent test profiles can be stored in the MPS43, each of which consisting of 26 test points. Profile results, containing the readings of up to 3 UUTs can also be stored from each program, up to a maximum of 300 results.

REMOTE CONTROL

The instrument can be remotely controlled by ADWIN software from an external PC.



DMA-Aero

Internal pumps run only in control mode of operation

Fully automatic control. User programmable limits

Portable and rugged splashproof case.
Easily carried to cockpit

Emergency battery power for 30 minutes operation

Store 30 test programs and results

Universal power input.
Low power consumption for
high accuracy and reliability



2 Channels of independent
pressure control for Static and Pitot.
Includes EPR generation

Color back-lit touch screen and color coded keypad.
Smart user interface showing all parameters at once

A wide range of pitot-static adapters and
adapter kits are available from DMA

Accuracy ± 3 ft at sea level, meets RVSM requirements





DMA-Aero

MPS43 Standard Specifications

	PARAMETER		RANGE		RESOLUTION		ACCURACY ^[3]
			MEASURE	CONTROL	MEASURE	SETPOINT	
STATIC	Altitude	(ft)	-2,000→55,000	-2,000→55,000	1	1	± 3 @ SL ± 7 @ 30,000 ± 18 @ 50,000
	Vertical speed	(ft/min)	0→6,000	0→6,000	5 @ < 3,000 ^[1] 25 @ > 3,000	1	± 1% of setting
	Static	(inHg abs) (hPa abs)	2.7→32 91→1090	2.7→32 91→1090	0.001 0.01	0.001 0.01	± 0.003 ± 0.1
PITOT	Airspeed	Standard (kts)	10→550	10→550	1 @ < 50 0.1 @ > 50	1	± 0.5 @ 50 ± 0.1 @ > 500
		Ultra low speed function ^[2] (kts)	5→200	5→200	0.1 @ > 20		± 0.03 hPa
	Airspeed slew rate	(kts/min)	0→500	0→500	10	10	± 10 ± 1% of setting
	Mach No.	(mach)	0→1.5	0→1.5	0.001	0.001	< ± 0.003
	Pitot (Qc)	(inHg diff)	0→17	0→17	0.0001	0.0001	± 0.005
		(hPa diff)	0→581	0→581	0.01	0.01	± 0.17
	Engine Pressure Ratio	(EPR)	1→2.5 @ SL	1→2.5 @ SL	0.001	0.001	± 0.001

Notes: Control capability on all load volumes: Static: 0 to 90 cu. in. (1.5 L), Pitot: 0 to 60 cu. in. (1 L). Larger volumes acceptable

¹ Selectable to ± 1 ft/min ² Activated on request, below 200 kts

³ Total accuracy includes all metrological uncertainty contributions for the pressure measured. Metrological data has full traceability to NIST.

STANDARD TEST FUNCTIONS

- Pressure/vacuum generation
- Automatic leak check
- Controlled venting to ambient
- Altitude/airspeed input
- Static/dynamic(Qc)/total pressure input
- Altitude/airspeed rates input
- Mach Number input
- EPR generation
- TAS / IAS toggle , TAS temperature correction
- Altitude offset correction
- 30 user test programmed profiles of 26 steps each. Results from 3 UUTs can be stored up to a total of 300 results.
- Ultra low speed (5 to 200 kts) for improved accuracy and stability
- Audible indication when approaching set point

DISPLAY AND KEYPAD

Integral display and keypad in splash proof and shock protected front panel.
Multi-colored backlit LCD touch screen, 3.5" (114mm) diagonal, displays all test parameters.

DISPLAYED UNITS

Altitude: ft, m, hm
Airspeed: kts, km/h, mph
Pressure: inHg, hPa, kPa, Pa, psi, mmHg, inH2O

CALIBRATION

One year interval, performed using software.

PHYSICAL SPECIFICATIONS

Weight: 8.8 lbs. (4 kg.)
Dimensions: L 11.8 x W 9.8 x H 4.7 in.
(L 300 x W 250 x H 120 mm)
Connections: Static: AN-4 37° flare
Pitot: AN-3 37° flare

Fittings fitted with O-ring for finger-tight sealing.
Captive dust caps supplied.

ENVIRONMENTAL

Temperature range
Operating: -5°C to +50°C
Storage: -20°C to +70°C
Splashproof and shockproof.
CE compliant.

POWER SUPPLY

Universal power supply: 90-240 VAC; 50-400 Hz.
20 VA

Rechargeable internal battery providing 30 minutes back up for safe shut down.
For greater battery life operation use EPU6

WARRANTY

Unit: 2 Years
Pumps: 1500 hours or 2 years, whichever expires first.

OPTIONS

- A0** 28 VDC
- A2** No internal battery
- B7** Gray Code Altitude Device Read-out
- F4** ADWIN PC Control software (unlocked)
- J5** Extended Range 650 knots at -320ft
- K1** AN4 (Ps), AN4 (Pt)
- K2** AN6 (Ps), AN4 (Pt)
- K5** Staubli red (Ps), Staubli black (Pt)

INCLUDED ACCESSORIES

ADWIN PC Control software (MPS43/43H only)
USB cable
Power cable
Hoses and fittings

ASSOCIATED PRODUCTS

Pitot-static adapters
EPU6 External battery power unit, providing 6 hours operation.
DMAKV2 Vacuum Source for adapter hold down use.
Pressure indicators/transfer standards



Ongoing development results in specifications being subject to change without notice



DMA-Aero

11 Old Sugar Hollow Road
Danbury, CT 06810

Tel: 203 790-8371
Fax: 203 743-2051

E-mail: sales@dma-aero.com
Web: www.dma-aero.com

Representative